


EXECUTION



- One-piece body ball valve
- Reduced or full bore
- Flange connections according to DIN 2501 / DIN 2526 – PN 10/16, ANSI B 16.5
- Face to face dimensions according to DIN 3202-F18 (F4/F5), EN 558-1-14/15, ANSI B 16.10 – A-150

Also available with DVGW approval for gas, ball in stainless steel with antistatic device, ATEX certified.

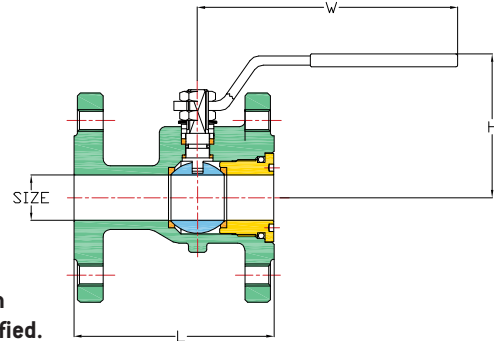

MATERIAL

	CAST IRON	CAST STEEL	STAINLESS STEEL
BODY	EN-GJL-250 (GG25)	WCB	CF8M
END CONNECTION	ASTM A105	WCB	CF8M
BALL	CW617N UNI EN 12165	CF8M	CF8M
SEAT	PTFE	PTFE	PTFE
BV TYPE	BV7-2111T	BV7-4466T	BV7-6666T

DIMENSIONS

SIZE		L	W	H	L	W	H
DN 15	1/2"	110,0	174,0	73,0	108,0	140,0	73,0
DN 20	3/4"	120,0	174,0	76,0	117,0	140,0	76,0
DN 25	1"	125,0	174,0	79,0	127,0	180,0	86,0
DN 32	1 1/4"	130,0	174,0	85,0	U/R	U/R	U/R
DN 40	1 1/2"	140,0	250,0	103,0	165,0	200,0	119,0
DN 50	2"	150,0	250,0	110,0	178,0	230,0	127,0
DN 65	2 1/2"	170,0	321,0	126,0	190,0	230,0	136,0
DN 80	3"	180,0	321,0	137,0	203,0	325,0	164,0
DN 100	4"	190,0	381,0	158,0	230,0	325,0	178,0
DN 125	5"	200,0	381,0	180,0	U/R	U/R	U/R
DN 150	6"	210,0	700,0	265,0	394,0	350,0	264,0
DN 200	8"	400,0	700,0	308,0	U/R	U/R	U/R
				BV7-2111T PN 16	BV7-6666T / BV7-4466T ANSI 150		

Dimensions in mm / U/R = Upon request